

SPECIFICATIONS

TC-96LR Tray Closer Conveyor

TYPICAL POWER REQUIREMENTS:

ELECTRICAL: 115VAC or 220VAC

MAXIMUM SPEED:

50 Trays Per Minute.

OPTIONS AVAILABLE:


- ✚ Add-on sections to a total length of 48'
- ✚ Machine Orientation
- ✚ Locking Casters
- ✚ Adjustable Leveler Pads
- ✚ Wash-down Applications
- ✚ Belt Material
- ✚ TCAS-120, 10' Add-on Section
- ✚ TCAS-60, 5' Add-on Section
- ✚ Each Add-on section can be used for Denester, Additional Hand-packing, Pack-off or Labeling
- ✚ Clutch & Brake indexing for Product Pick & Place.

PRODUCT SIZE RANGE:

- ✚ Min. 3" – Max 12"
This measurement is from hinge to closed end.

PRODUCTS TYPICALLY HANDLED:

- ✚ Muffin Packs
- ✚ Croissant Packs
- ✚ Sliced Cake
- ✚ Ice Cream Sandwiches
- ✚ Bagel Packs
- ✚ Cookies

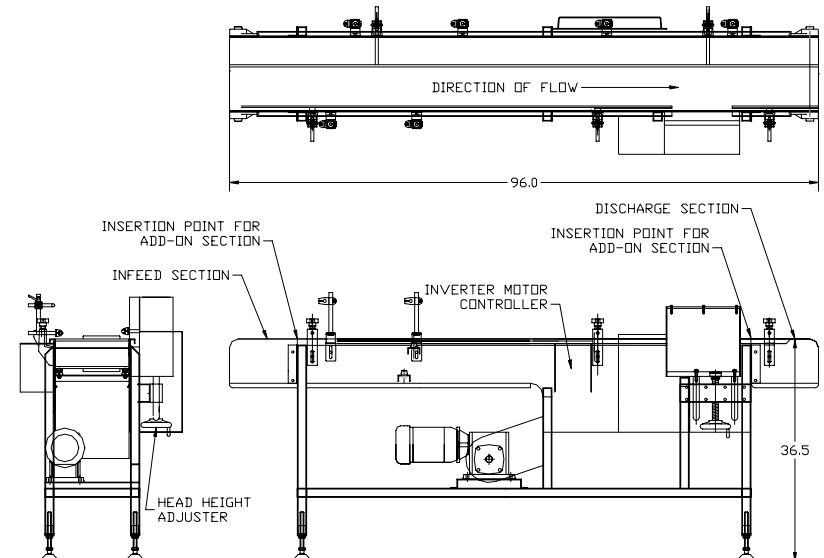

Air Draulic Engineering Co., Inc.

59 YORK AVENUE,
RANDOLPH, MASS. 02368
781-961-1350 Fax: 781-961-2606
EMAIL: INFO@AIRDRAULICENGINEERING.COM
WWW.AIRDRAULICENGINEERING.COM